

HANDRAIL

Decowood Escort Marine Handrail

Escort Decowood Marine handrails meet all the criteria given in the IMO Resolution A.653 (16) and can be considered to have low flame spread in compliance with the International Convention SOLAS (2000), as amended.

PRODUCT DESCRIPTION

Wood effect handrail with a diameter of 40 mm. The wood effect profile comprises a groove into which wall brackets, accessories and matching closer slide and lock. Perforated wall brackets are curved, 40 mm deep and made of satin silver anodised aluminium. Accessories made of wood effect PVC (wall returns, end caps, external and internal 90° angle pieces or customized from 104° to 150°) are fitted on the profile and fixed with locking screws. Our handrails are heavy metals free and manufacturing according to the calcium-zinc thermal stabilisation process.

- **Colours:** 5 standard wood effect colours.
- **Fixing components:** 2-point self-locking perforated brackets, satin silver anodised aluminium finish.


• Dimensions :

- Diameter: 40 mm
- Length: 4 m
- Overall projection: 80 mm
- Stand-off from wall: 40 mm


- **Material:** aluminium profile with wood effect vinyl sheath.

APPLICATIONS


Elegant wood effect handrails and curved, unobtrusive brackets. They are ideal for all types of ships and offshore platforms, notably in corridors and stairways for an improved passenger's and crew's safety. All handrails are fitted with bactericidal joints.

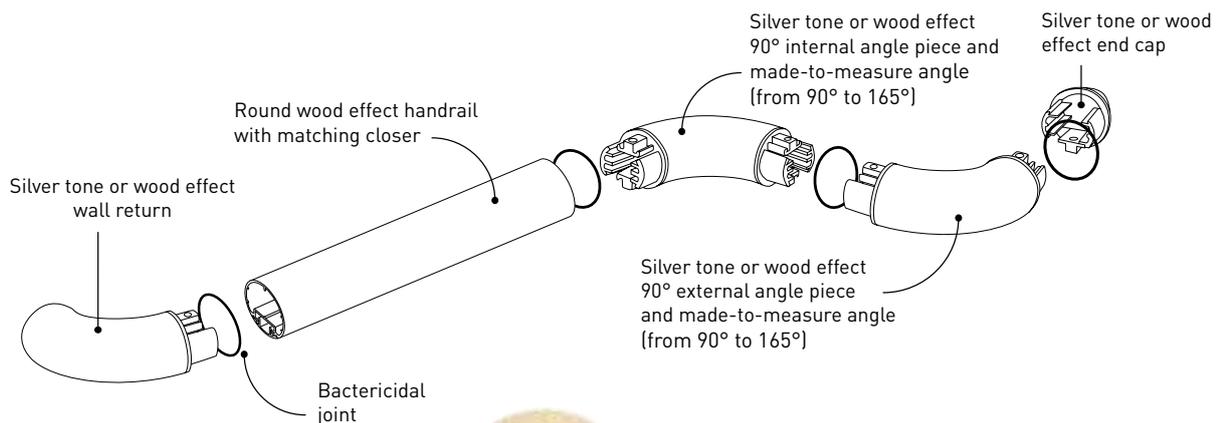


Decowood Escort Marine Handrail



80 mm:
Self-locking perforated satin silver anodised aluminium bracket



60 mm:
Self-locking full satin silver anodised aluminium bracket



55 mm:
Self-locking bugled satin silver anodised aluminium bracket



0060 Maple



0061 Beech



0064 Mature Oak



0062 Light Oak



0065 Stripped Pine



WALL PROTECTION

Decochoc Marine wall protection & decorative panels

Decochoc Marine wall protection panels meet all the criteria given in the IMO Resolution A.653 (16) and can be considered to have low flame spread in compliance with the International Convention SOLAS (2000), as amended.



PRODUCT DESCRIPTION

Protection and covering panel from rigid PVC with solid colour and embossed surface. Our panels are heavy metals free and are manufactured according to the calcium-zinc thermal stabilisation process. Decochoc Marine has subtle and matt finish for a muted, sober appearance with all the usual levels of resistance to impact, scratches, wear and chemical agents.

- **Panels dimensions:** 3 m x 1.30 m
- Cut to size according to requirements
- Bends according to requirements
- **Thickness:** 2 mm
- **Material:** solid colour PVC

- **Surface finish:** slightly embossed


- **Fixing:** Acrylic adhesive. Decochoc Marine panels can be installed with either silicone joints or PVC weld joints (colour coordinated with the panels). Please consult us for colour availability.

- **Panels colours:** 30 standard

APPLICATIONS


Total protection for large walls and surfaces. Decochoc Marine offers an incomparable protection and decorative solution for the walls on ships, thanks to its wide choice of standard colours. Ideally suited to a use in passengers areas, corridors, doors, these panels can also be used in cabins.

Decochoc Marine 30 colours

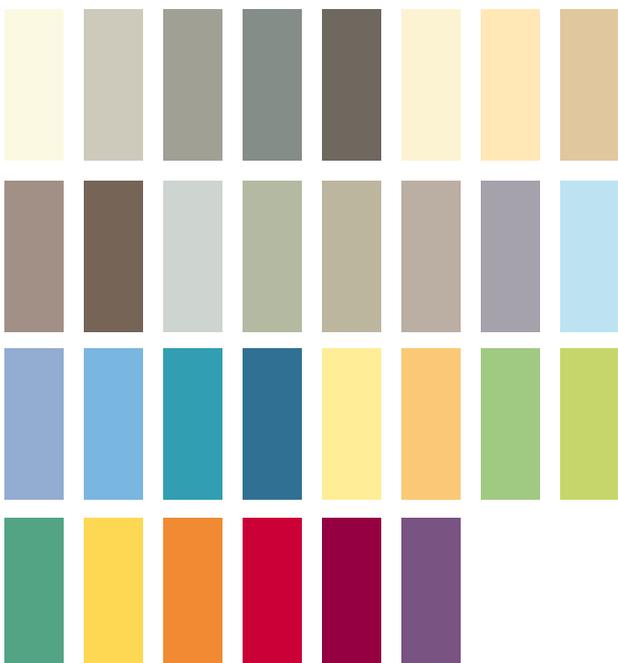

ACCESSORIES

Semi-rigid skirting



VYNAFLEX

Semi-rigid PVC skirting to be placed on straight walls

0483 - 0482 - 0477

	0822		6512
	0464*		0492*
	0462*		0436
	0463		0430
	0454		0434*
	0449*		0429*


* Available only for 60 mm and 80 mm



Benefits:

- Solid colour
- Resistant to washing waters


Stair nosing insert

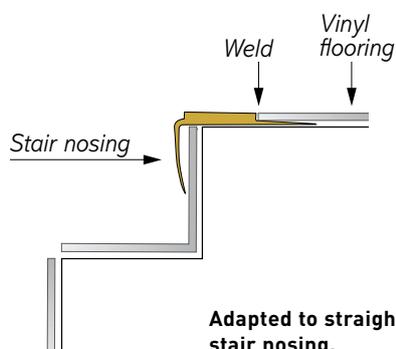

Adapted to straight stair nosing and rounded stair nosing.

- ▶ Install the vinyl flooring and the stair nosing by starting at the bottom of the stair
- ▶ Install the riser
- ▶ Install the stair nosing
- ▶ Install the flat of the stair
- ▶ Weld

Grooved PVC stair nosing






0462
0461
0464

Straight angles

T49/3R
T49/2R
T594/2R

- ▶ Grooves provide anti-slip protection
- ▶ Landing/Stair harmony
- ▶ Ensures floor covering durability

- T49/3R - T49/2R - T594/2R :
- ▶ Adapted to 2 mm floor covering
 - ▶ Weldable



	4203		6281		6512		6506		9201*		4206*	<small>* Available only for T49/2R</small>
--	------	--	------	--	------	--	------	--	-------	--	-------	--

Gerflor Corner system


A unique system which makes cleaning in the corners more efficient and hygienic.

The Gerflor corner system is a technical installation for internal and external angles which uses a specially cut piece of flooring to eliminate the need for corner welding. This system is recommended in ship areas where a perfect cleaning is required (leg medical centers).




TOOLS

To install




GERFLOR PART NUMBER

942X0900
"Flipper" Knife
(2 units)




GERFLOR PART NUMBER

942H0900
Box of 5 "Green Box"
(100 straight blades)



GERFLOR PART NUMBER


942E0900
Box of 5 "Green Box"
(100 hooked blades)



GERFLOR PART NUMBER

943J0900
Expanding Ruler
(210 x 8 cm) Flexible steel

To glue



GERFLOR PART NUMBER

05450001
Thriftline trowel
18 cm wide




GERFLOR PART NUMBER

05470001
Notch profile 18 cm - A2 (x10)



GERFLOR PART NUMBER

943Q0900
Cork Hand Smoothing Press with
rounded edges (Dim.300x120x25 mm)



GERFLOR PART NUMBER


05660001
Gripper shears



JANSER PART NUMBER


262 390 000
Pressure roller

To weld




GERFLOR PART NUMBER

942G0900
Triangular scraper
942U0900
Spare blade for triangular scraper




GERFLOR PART NUMBER

942V0900
Spatula Trimming Knife



GERFLOR PART NUMBER

943T0900
Knife Sheath



GERFLOR PART NUMBER

943U0900
Trimming Guide



GERFLOR PART NUMBER

05610001
Mozart Knife
05420001
Spare blades for Mozart Knife (5 units)



GERFLOR PART NUMBER

942C0900
Hot Welding Gun Leister Triac's
220 V




GERFLOR PART NUMBER

945E0900
Ultra Rapid Nozzle



JANSER PART NUMBER

224 800 013
Elbowed Ultra Rapid Nozzle




GERFLOR PART NUMBER

05620001
Flash coving Trimmer

Technical support

A team of technical specialists is available to provide application and advices for pre and post projects (subfloor preparation, floor covering installation) or expert analysis.


SKIRTING AND COVING

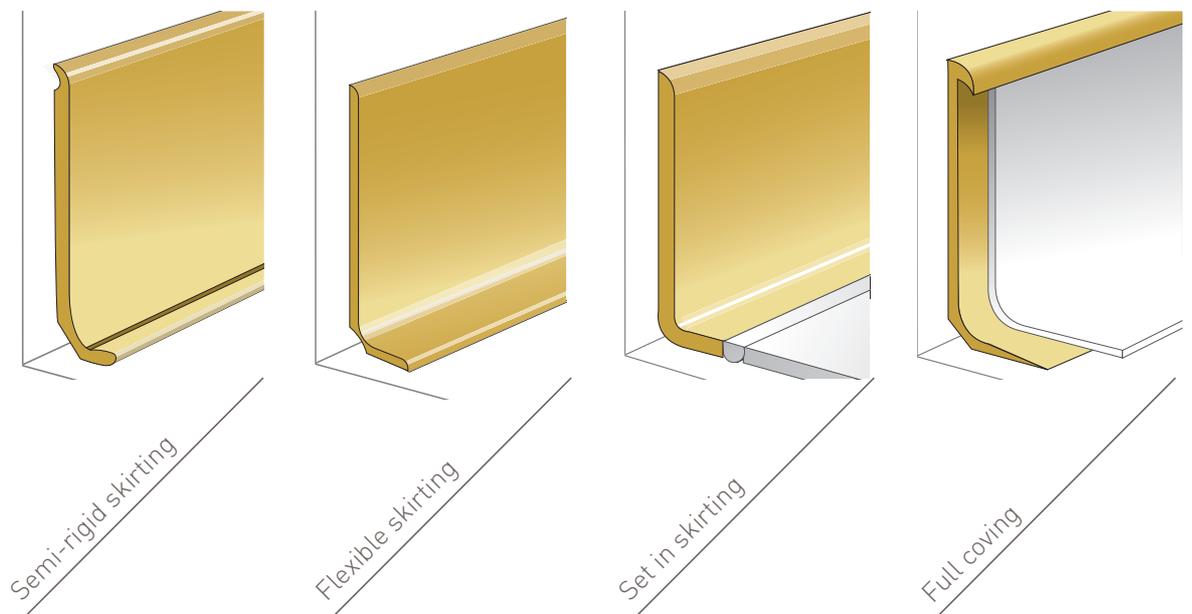


There are two ways of finishing the junction between the floor and wall:

- 1** Installing the PVC covering up to the edge of the wall and using a skirting insert.


This is cost effective and time saving.

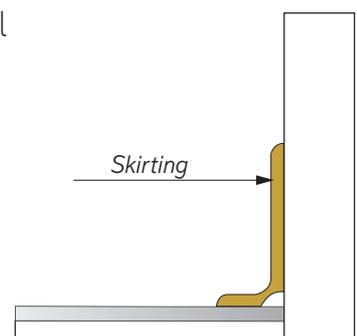


SOLUTIONS

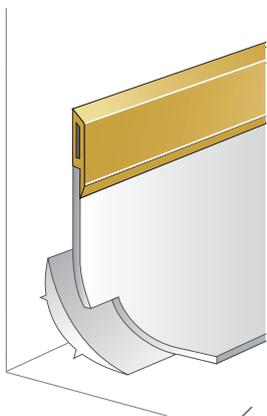

Capping strip

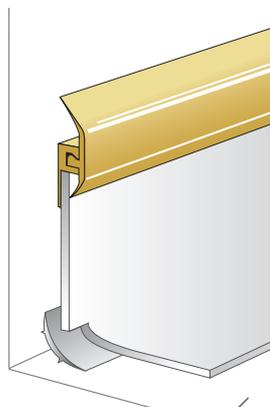

Capping strip -
Clip system




Cove former

2

Making a cove.

This solution makes it easier to clean inside angles and edges. It gives a waterproof connection wall/floor covering.




FINISHES

SKIRTINGS

Description

Semi-rigid skirting




VYNAFLEX

Semi-rigid PVC skirting to be placed on the wall

0483 - 0482 - 0477

Flexible skirting




FLEXIBLE SIT ON

PVC skirting


► To be placed on the covering

0475 - 0474 - 0472 - 0471

Colors

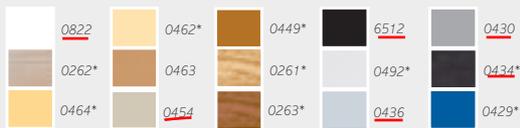


* available only for 60 mm et 80 mm




Benefits

- Solid colour
- Resistant to washing waters
- **Stylish**, wood design

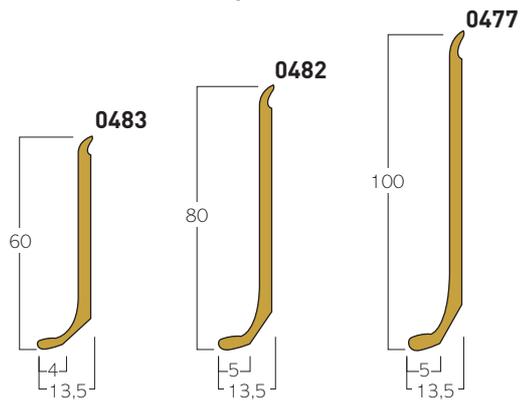

- Floor/wall junction of rooms and corridors
- Can be used with non-planar walls
- **Easy to install**

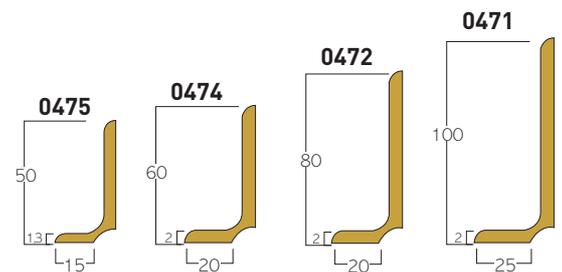


Tips

- Use skirting corner Cutter to handle internal and external angles
- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting
- Apply an adhesion primer if the sub-floor is porous

- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting
- Apply an adhesion primer if the sub-floor is porous

SKIRTINGS

Flexible skirting



0470


FLEXIBLE SET IN SKIRTING

Flexible PVC skirting

- ▶ To be placed at the same level as the wall
- ▶ To be welded to the floor



- ▶ Replaces coving
- ▶ Provides **watertight seal**

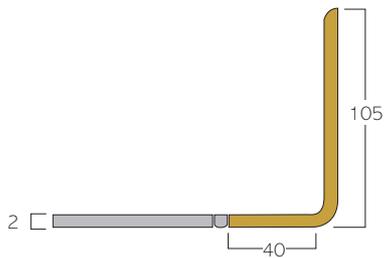

- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting
- Apply an adhesion primer if the sub-floor is porous

Colours and images are not contractual.




FINISHES

COVING SOLUTIONS

PVC Capping strips

Description




0481

FULL COVING

PVC profile combining the cover former and the capping strip into a single product.

- ▶ Adapted to the hospital sector and any room requiring a waterproof skirting.





0491

CAPPING STRIPS

Rigid capping strip with flexible lip


- ▶ Do not use in commercial kitchens and showers

Colors




Benefits

- ▶ Maximum floor covering thickness **4 mm**
- ▶ **Compensates sub-floor defects**
- ▶ **Hygienic** and makes cleaning angles easier
- ▶ Guarantees **watertightness**
- ▶ **Quick to install**

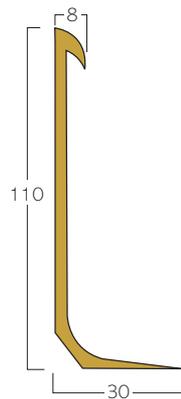

- ▶ Maximum covering thickness: 4 mm
- ▶ **Hygienic**
- ▶ **Easy to install**




Tips

- Heat the skirting with a heat gun in order for it match the shape of the wall
- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting

- Slightly heat the strip if it whitens once installed
- Use a miter shear for a perfect cut
- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting

COVING SOLUTIONS

PVC Capping strips



P1509 / P769

Finishes that can be welded to the floor covering



- ▶ Do not use in commercial kitchens and showers

0496

0493

P1509		4203	P769		4203
		6512			6512
					6506

- ▶ P769: Adapted to 2 mm floors
- ▶ P1509: Adapted to 2.2 mm floors

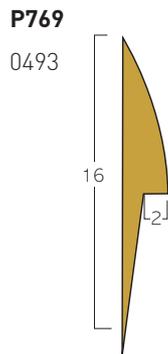

CAPPING STRIP- CLIP SYSTEM


Rigid clipped finishing profile with 2 flexible lips

- ▶ Capping strip that covers the skirting

0492

	0660		0626		0653		9201		0647
	0601		0624		9403		4206		6281
	0822		0672		0675		0682		4207

- ▶ Maximum floor covering thickness: 4 mm
- ▶ Good watertightseal for finishing floor-wall covers and floor-wall systems notably in industrial kitchens
- ▶ **Easy to install** thanks to the clip system




- May also be used as a floor stopping profile
- Weld with SG916
- Use either a double bonding adhesive, a dispersion contact adhesive or a two-side adhesive compatible with the PVC skirting

Colours and images are not contractual.

- Heat the profile with a heat gun (temperature about 150°C) for the installation of the external corners
- Use a miter shear for a perfect cut
- Use SG916 for a perfect finish of the internal corners
- Slightly heat the profile if it whitens once installed
- Use either a double bonding adhesive, a dispersion contact adhesive or a double sided tape compatible with the PVC skirting

PVC COVE FORMER

Description



COVE FORMER

This accessory allows the floor-wall cove to be formed.


0478 - 0479 - 0480

Colors



Benefits

- ▶ Its rounded shape **makes it easier to clean** the floor-wall junction.
- ▶ Gives a better look
- ▶ Limits the risk of piercing the floor covering
- ▶ **Prevents accumulation** of dirt and bacteria

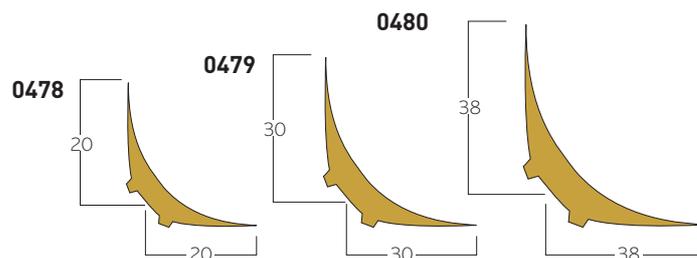

Tips

- Use a miter shear for a perfect cut

SELECTION GUIDE

Skirting

	Semi-rigid skirting		Flexible skirting	
	Vynaflex		Sit on	Set in
	Semi-rigid skirting, wood design		Skirting - positioned on covering	Flexible skirting - welded to the floor
Criteria	Product performance characteristics			
Design	***	*	*	
Aesthetic appeal	****	*	*	
Cost	**	****	**	
Watertightness	*	*	***	
Impact resistance	**	***	***	
Where?	Home - Office - Retail Service sector - Industry		Schools - Leisure	Health - Industry

Cove formers and capping strips



	Capping strips				
	Full coving	Capping strip	P769	P1509	Clipped
	Cove former with capping strip	Rigid with 1 flexible lip	Can be welded to the floor covering	Can be welded to the floor covering	Rigid with 2 flexible lips
Criteria desired	Product performance				
Hygiene	**	**	***	***	****
Watertightness	**	**	*** (in case of welding)	*** (in case of welding)	****
Floor covering thickness	Up to 4mm	Up to 4mm	2mm	2.2mm	Up to 4mm
Where?	Health Industry	Health Industry	Hospitals, in bedrooms and corridors	Hospitals, in bedrooms and corridors	All rooms as well as in commercial kitchens

LEGEND

-				+
*	**	***	****	

Refer to the product glossary for information on colours and packaging

STAIR

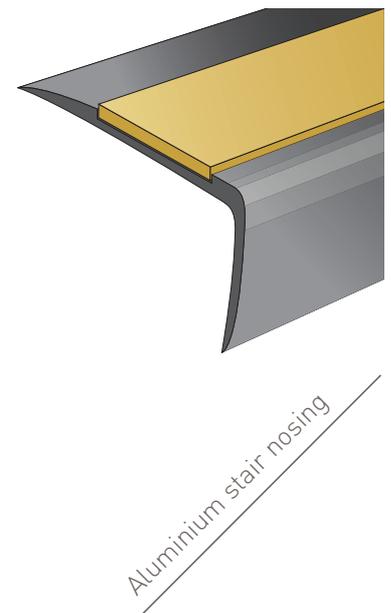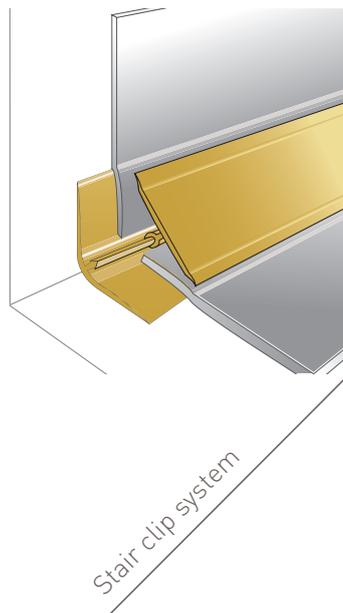

Gerflor has developed 2 solutions for installing a Vinyl floor on stairs to complement


1 Tarastep

- ▶ Install the base of the finishing clip onto the flat angle of the stair
- ▶ Install the Tarastep
- ▶ Clip the stair clip system

Adapted to rounded stair nosing.

Mill the angle for straight stair nosing.


For bird's beak stair nosing, fill the void beforehand.

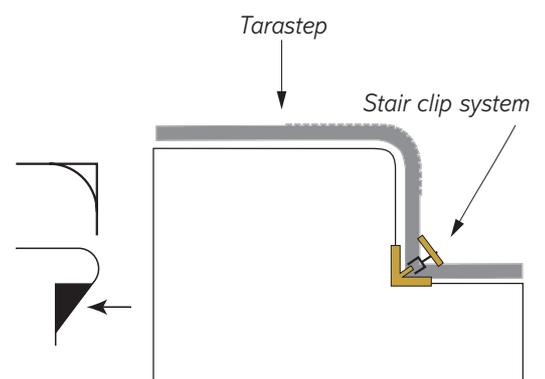

SOLUTIONS



Smooth stair nosing



Grooved stair nosing


its range of floors:

2

Stair nosing insert

- ▶ Install the vinyl flooring and the stair nosing by starting at the bottom of the stair
- ▶ Install the riser
- ▶ Install the stair nosing
- ▶ Install the flat of the stair
- ▶ Weld

Adapted to straight stair nosing, rounded stair nosing and bird's beak stair nosing.

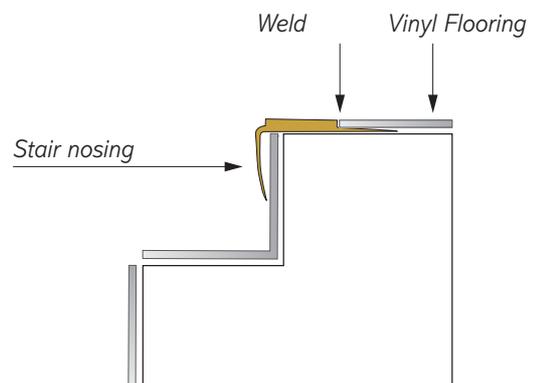


FINISHES

STAIRS

Description

PVC product installed with the Tarastep




STAIR CLIP SYSTEM

- ▶ Perfect stair finish, highlights the bottom of the stair

H138

Stair nosing insert



0557

ALUMINIUM STAIR NOSING T67 ALU


- ▶ Cuts the floor covering colour for safety signage
- ▶ landing/stair harmony
- ▶ Guarantees floor covering durability

Colors



*Contact us for availability


To be used with

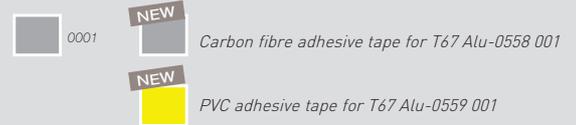

Benefits


Ensures:

- ▶ Better **watertight seal**,
- ▶ A better **look**,
- ▶ **Durability** of the floor covering
- ▶ **Easy maintenance**

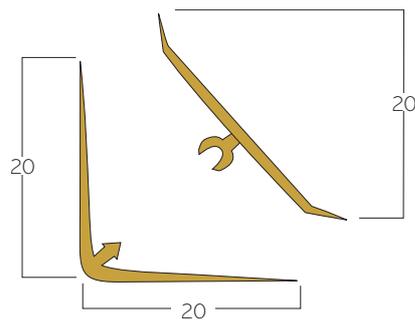

▶ For a state-of-the-art stair finish

- ▶ Grey and yellow strips for the safety of people with visual impairments

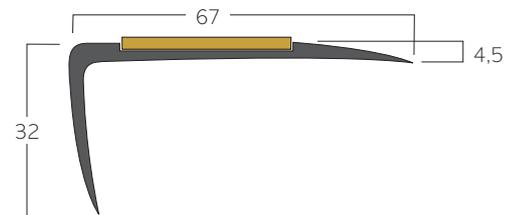


Tips

- Tip: Slightly heat the stair clip system if it whitens once installed.
- Use a miter shear for perfect cut
- The base is installed prior to the floor covering, then clip in the cover.

- Secure with flat head cross head countersunk stainless steel screws (not included).

STAIRS

Stair nosing insert



0465

SMOOTH PVC
STAIR NOSING

T766



0460 - 0463

T49/2G - T594/2G

Straight angles

- ▶ Landing/Stair harmony
- ▶ Ensures floor covering durability



0462 - 0461 - 0464

GROOVED PVC STAIR
NOSING

T49/3R - T49/2R - T594/2R
Straight angles



0467


T27/3R

Rounded angles and bird's beak

- ▶ Grooves provide anti-slip protection
- ▶ Landing/Stair harmony
- ▶ Ensures floor covering durability



*available only for T49/2G




*available only for T49/2R

T766 :

- ▶ Adapted to 4 mm floor covering
- ▶ Provides floor covering protection

T49/2G

- ▶ Adapted to 2 mm floor covering
- ▶ Weldable

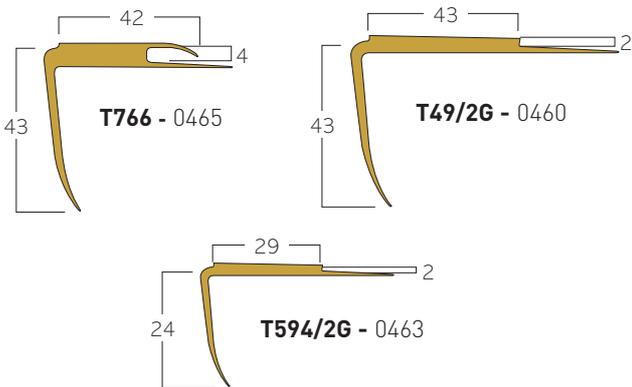


T49/3R - T49/2R - T594/2R :

- ▶ Adapted to 2 or 3 mm floor covering
- ▶ Weldable

T27/3R :

- ▶ Adapted to 3 mm floor covering
- ▶ Weldable

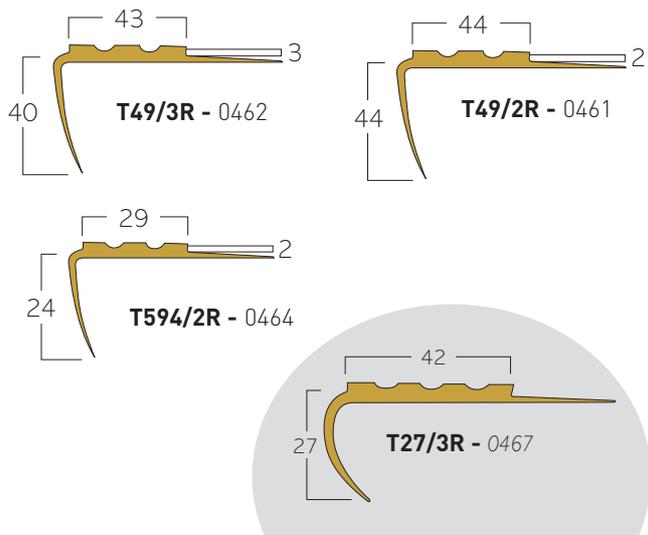


- Do not apply adhesive to the vertical part of the stair nosing
- Double bonding


Colours and images are not contractual.

PROFILE


Our profiles provide solutions to several problems concerning flooring thickness and technical requirements



Diminishing profile



Connecting profile



Connection profile


They in particular, allow two types of connections to be dealt with:

1 Connecting profiles

The connections between two floor coverings


- ▶ Floor/Floor
- ▶ Floor/wall

Allow the link between two floor coverings with different thicknesses.

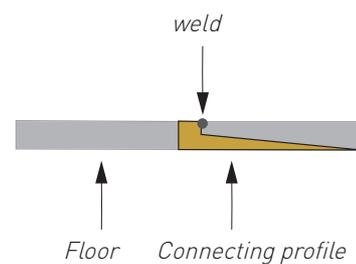


SOLUTIONS


links between floors, walls or bare spots depending on the



Shower threshold profile



Ramp edges




Aluminium profiles

2 Ramp edges





The vinyl floor/bare spot connections

Protect the edging and prevent the floor covering from delaminating.

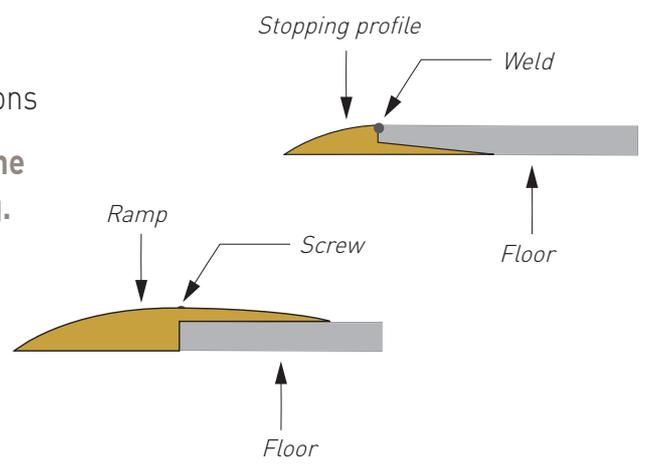


FINISHES

PVC CONNECTING PROFILES

	Floor to wall profile	Floor to floor connecting profiles
Description	 <p>0490</p> <p>DIMINISHING PROFILE</p> <ul style="list-style-type: none"> ▶ Coving/wall covering connection ▶ Used in laboratories, hospital shower systems, commercial kitchens 	 <p>0495</p> <p>P1224</p> <ul style="list-style-type: none"> ▶ These products allow the link between two floor coverings to be made
Colors	 6512	 6512 4203
Benefits	<ul style="list-style-type: none"> ▶ Makes it easier to link the floor covering and wall. ▶ Hygienic. Avoids bacteria accumulation ▶ Prevents the floor covering from tearing, improves durability and ensures watertightness. 	<ul style="list-style-type: none"> ▶ Junction between two floors ranging up to 4 mm thick ▶ Floor covering coverage system 
Tips	<ul style="list-style-type: none"> ● <i>Bonding with acrylic adhesive</i> 	<ul style="list-style-type: none"> ● <i>Polychloroprene double bonding</i>

PVC CONNECTING PROFILES

Floor to floor connecting profiles



P1509

- ▶ These products allow the link between two-floor coverings to be made

0496




- ▶ Junction between two floors of 2.2 mm and 5 mm
- ▶ Floor covering can be welded to profile to create a watertight seal
- ▶ **Can also be used as a finishing profile**



- Polychloroprene double bonding

Shower threshold profile



SHOWER THRESHOLD


- ▶ Makes the junction between a floor covering and a shower covering

0469

EXCLUSIVE TO GERFLOR



- ▶ **Allows welding of 2 mm or 3.5 mm floor covering** thanks to the **tab** system
- ▶ **Weld** system with the covering which ensures perfect **watertightness**

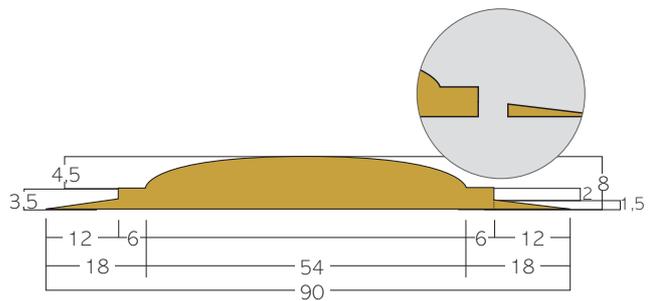

- The tab can be cut to suite a thicker floor
- Polychloroprene double bonding
- Application of sealant around the door jamb (PU or MS polymer sealant)


Colours and images are not contractual.

FINISHES


RAMP EDGES

Ramp edges

Description

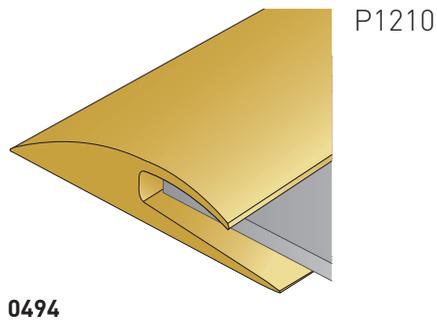

- ▶ Connect other surfaces and vinyl floors

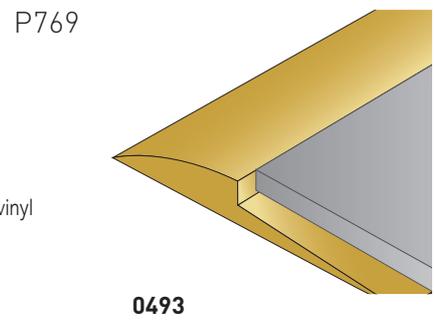


Colors




Benefits

- ▶ Floor covering coverage system
- ▶ Suitable up to 3.5 mm floors



- ▶ Floor covering **welding** system
- ▶ Suitable for 2 mm floors
- ▶ Ensures watertight seal
- ▶ Can also be used as a capping strip




Tips

- Double bonding

RAMP EDGES

Aluminium profiles GTI, Creation and Attraction®

New




CREATION

0560



0001

GTI / ATTRACTION®



H202 - H205


► Access ramps resistant to high traffic and humidity

Products suitable for floor coverings of:


- 2,5 mm (**Creation**)
- 5 mm (**Attraction® and TX Multi-Use 5.0**)
- 6 mm (**GTI/GTI MAX and TX Multi-Use 6.2**)



Creation 0560

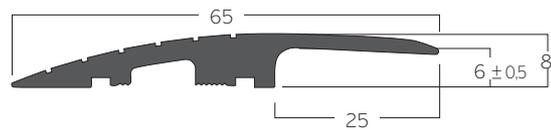

GTI H202

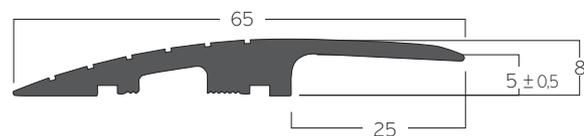

Attraction® H205

● *Screwing of the floor covering to the floor with flat cross head countersunk stainless steel screws (not included)*

Colours and images are not contractual.